

A new vision
of outdoors



Soltis

Veozip

Applications

ZIP blinds (façade and pergola), external blinds, vertical veranda blinds



- Optimised for facade external blinds using ZIP systems
- Blocks 95 to 97% of the heat ($0.03 \leq g_{\text{tot}}^e \leq 0.05$ with D glazing) (*)
- Blocks at least 93% of the heat ($g_{\text{tot}}^e \leq 0.07$) regardless of the glazing or color (**)
- Euroclass B-s2, d0
- Certification High UV colour fastness

(*) calculation based on ISO 52022-3

(**) calculation based on ISO 52022-3 for Type D glazing



Blocks up to 96%
of UV rays



Enjoy the shade and keep your view.

Soltis Veozip is the ideal fabric for enjoying your outdoor view due to its unmatched transparency. Its matt, woven aspect will embody your terrace's warm, elegant design.

As an effective extension of your living space, your pergola equipped with **Soltis Veozip** creates a real cocoon outside. You'll fully enjoy your fun times sheltered from the wind and heat, while remaining within your outdoor environment.




Hemp-base
composition for
natural fabric
aspect



Blocks up to 96%
of UV radiation




Plays on
transparency



Protects
from wind


Soltis

Veozip

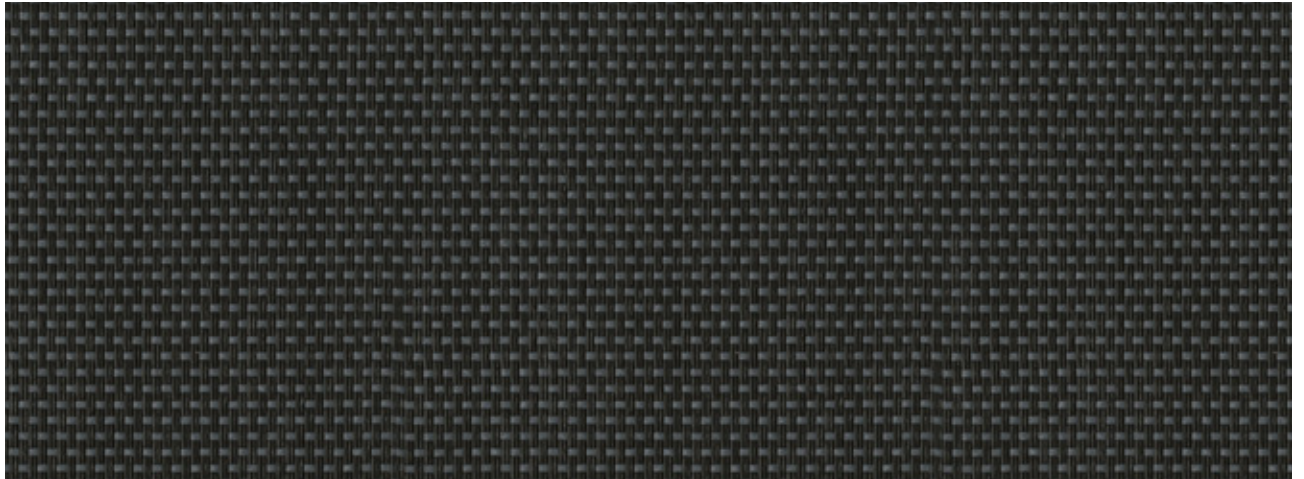

Shadow

7605-51194

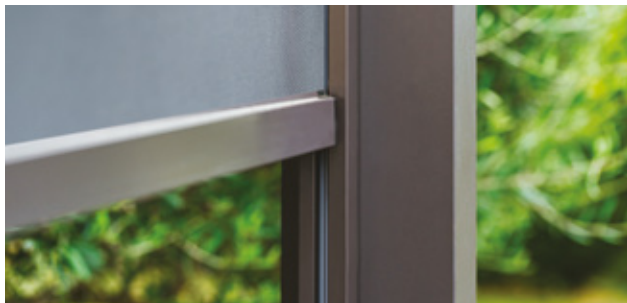

Perfect integration into ZIP systems.



Glare control for greater visual comfort during relaxing or remote working times.



Optimum thermal comfort to take maximum advantage of your terrace without excessive heat in mid-summer.


**Personalise the pergola
of your dreams!**



**Scan this
QR code**
to configure
your pergola




RAW

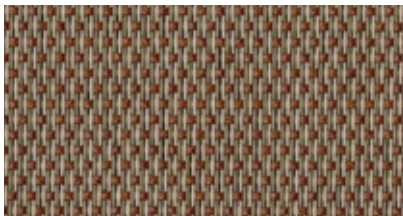


Macadamia

7605-51188

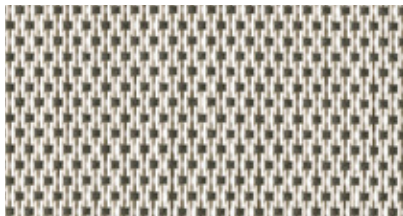


Edelweiss

7605-51185

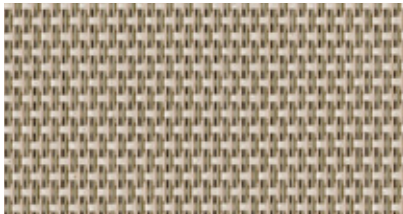

Natural

7605-51187

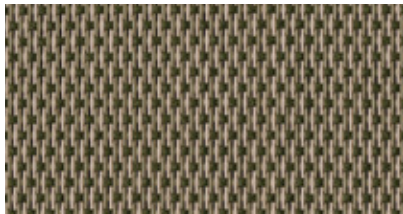

Tundra

7605-51190



RAL 9010




RAL 1013



RAL 1015

TROPICAL

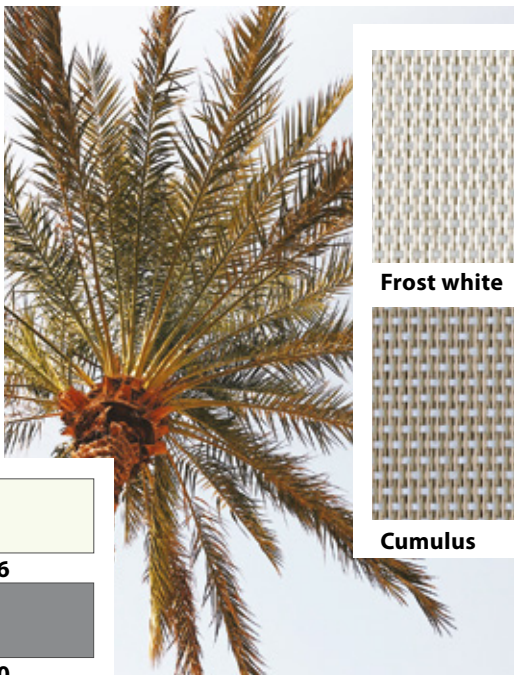


Frost white

7605-51184




Edelweiss

7605-51185

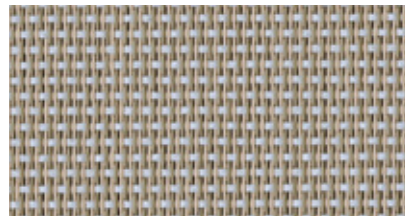

Cumulus

7605-51186

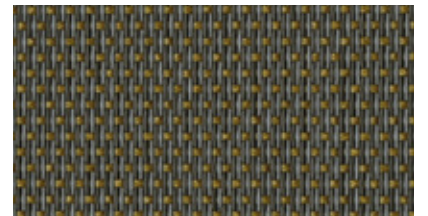

Lunar surface

7605-51191



RAL 9016



RAL 7030



RAL 7039





ELEGANT




RAL 9010



RAL 7016




RAL 9005

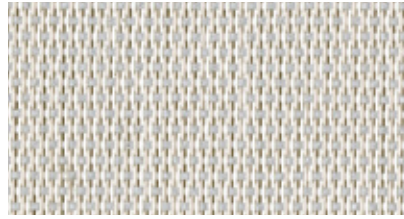


Frost white

7605-51184

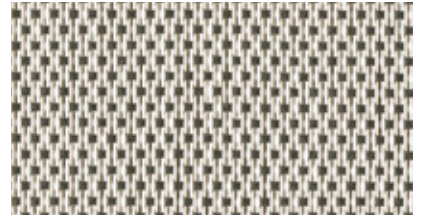

Edelweiss

7605-51185

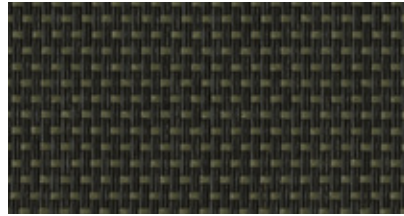

Volcano

7605-51195



Graphite black

7605-51198

SPICE



RAL 1019



RAL 8019




RAL 3004




Macadamia

7605-51188

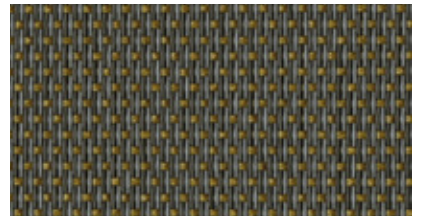


Lunar surface

7605-51191

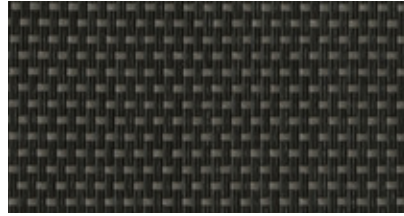


Grey pepper

7605-51197

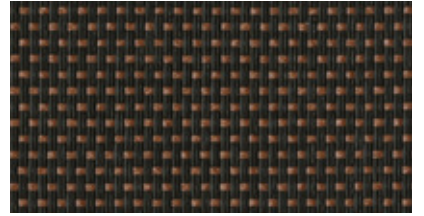

Sandalwood

7605-51196




RAL 7035



RAL 9007




RAL 7016

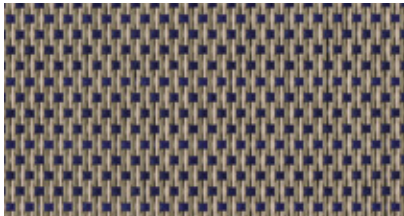

Mistral

7605-51189

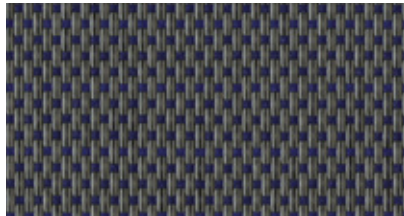

Sea urchin

7605-51193



Sea lion

7605-51192


















Shadow

7605-51194

PURE

■ Solar and light properties

		TS	RS	AS	TV n-h	g_{tot}^e ISO 52022-3** Type D glazing	
Frost white	51184		9	59	32	8	0.04
Edelweiss	51185		9	50	41	8	0.04
Cumulus	51186		6	37	57	6	0.04
Natural	51187		7	37	56	7	0.04
Macadamia	51188		5	29	66	4	0.03
Mistral	51189		5	28	67	5	0.03
Tundra	51190		6	27	67	5	0.04
Lunar surface	51191		7	18	75	6	0.04
Sea lion	51192		8	13	79	7	0.05
Sea urchin	51193		6	17	77	6	0.04
Shadow	51194		5	7	88	5	0.04
Volcano	51195		5	7	88	5	0.04
Sandalwood	51196		6	10	84	6	0.04
Grey pepper	51197		5	8	87	5	0.04
Graphite black	51198		5	5	90	5	0.04

TS : Solar Transmission (%)

RS : Solar Reflection (%)

AS : Solar Absorption (%)

TS + RS + AS = 100% of incident energy

TV n-h : Normal-hemispherical visible light transmission (%)

g_{tot}^e : Outdoor solar factor

** ISO 52022-3
detailed method


Consider the spectral transmission and reflection values for the glazing + blind combination to calculate the solar factor g_{tot}^e .
Glazing type "D": Low emission, insulating double glazing - face 2
(4 + 16 + 4; argon-filled) $g = 0.32$ - $U = 1.1$

Soltis


Veozip


	■ Technical properties	■ Standards
Openness factor	5 %	
Weight	600 g/m ² • 17.7 oz/sq.yd	EN ISO 2286-2
Thickness	0.90 mm • 900 microns	
Widths	250 cm* - 290 cm - 320 cm • 98.4 in.* - 114.2 in. - 126 in.	
■ Roll length		
Standard format: 250 cm roll width	42 lm • 45.93 yd	
Standard format: 290 cm roll width	42 lm • 45.93 yd	
Standard format: 320 cm roll width	35 lm • 38.28 yd	
■ Physical properties		
Tensile resistance (warp/weft)	250/170 daN/5 cm	EN ISO 1421
Tear resistance (warp/weft)	25/25 daN	DIN 53.363
■ Reaction to fire		
Rating	M1 /NFP 92-507 — B1 /DIN 4102-1 — BS 7837 — BS 5867 — Class 1 /UNI 9177-87 — Class 1 /EN 13773 Method 1&2 /NFPA 701 — CSFMT19 — Class A /ASTM E84 — CAN ULC S109 — 1530.2/ AS/NZS 1530.3/ AS/NZS	
Euroclass	B-s2,d0	EN 13501-1
■ Management system		
Quality		ISO 9001
Environment		ISO 14001
Energy		ISO 50001


■ Certifications, labels, warranties





Smart Yarn
Technology












5-year
warranty



■ Tools and services

Tool for evaluating the energy savings that can be achieved with Soltis solar protection: SOLTISSIM. Contact your Serge Ferrari representative.

¹ “+ = 0” logo: summarises the Serge Ferrari Group’s commitment to CSR, to align economic performance and positive impact. Find out about our concrete actions in our CSR report.

The technical data above are averaged values with a +/- 5% tolerance.

The buyer of our products is fully responsible for their application or their transformation concerning any possible third party. The buyer of our products is responsible for their implementation and installation according to the standards, use and customs and safety rules of the countries where they are used. For information on our contractual warranty, please refer to the relevant terms and conditions.

The values quoted above represent results of tests performed in compliance with common design practices and are provided for only to enable customers to make the best use of our products. Our products are subjects to evolutions due to technical progress, we remain entitled to modify the characteristics of our products at any time. The buyer of our products is responsible for checking the validity of the above data.

* Available during 2023